


## Bone Separator

This machine uses the same principle as the BAADER 694 and 697 but with much higher throughput. It is a further development of the BAADER 695.

The speed is infinitely variable up to twice the normal speed. The belt pressure is controlled by a hydraulic system. Pressure and speed indicators allow correct adjustment of the machine to different raw material.

The one sided mounting of drum and rollers allows quick disassembly and easy cleaning of all parts.

The machine is constructed of high grade materials, is hygienic and corrosion resistant.

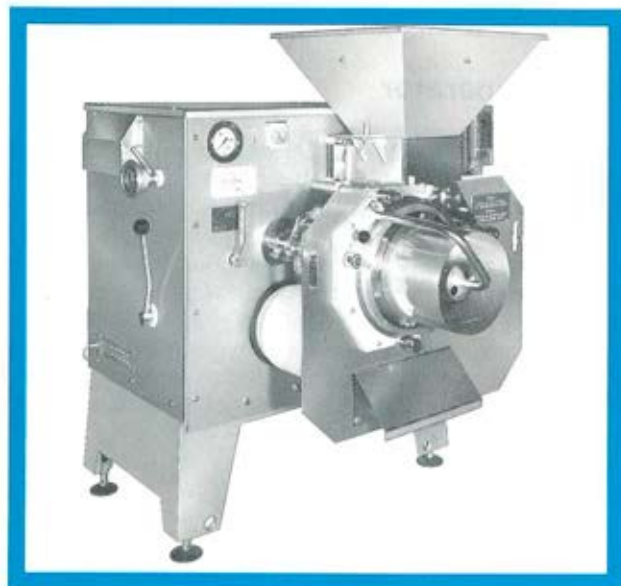

<b>Operator requirements</b>	1 person unless continuously fed by conveyor.
<b>Throughput</b>	1.800–3.000 kg/h
<b>Power requirements</b>	5.5 kW
<b>Dimensions</b>	1.50 x 1.50 x 1.70 m
<b>crated for shipping</b>	approx. 2.00 x 1.90 x 1.70 m
<b>Weight</b>	approx. 1.395 kg net approx. 1.770 kg gross